

Soap Dispenser (Foot Operated) – Surface Mounted


Soap Dispensers

MasterFormat Section 10 28 13



SUSTAINABILITY/LEED

MR 4.1 (1) MR 6 (1) EQ 4.2 (1)
MR 4.2 (1) EQ 4.1 (1) EQ 4.4 (1)

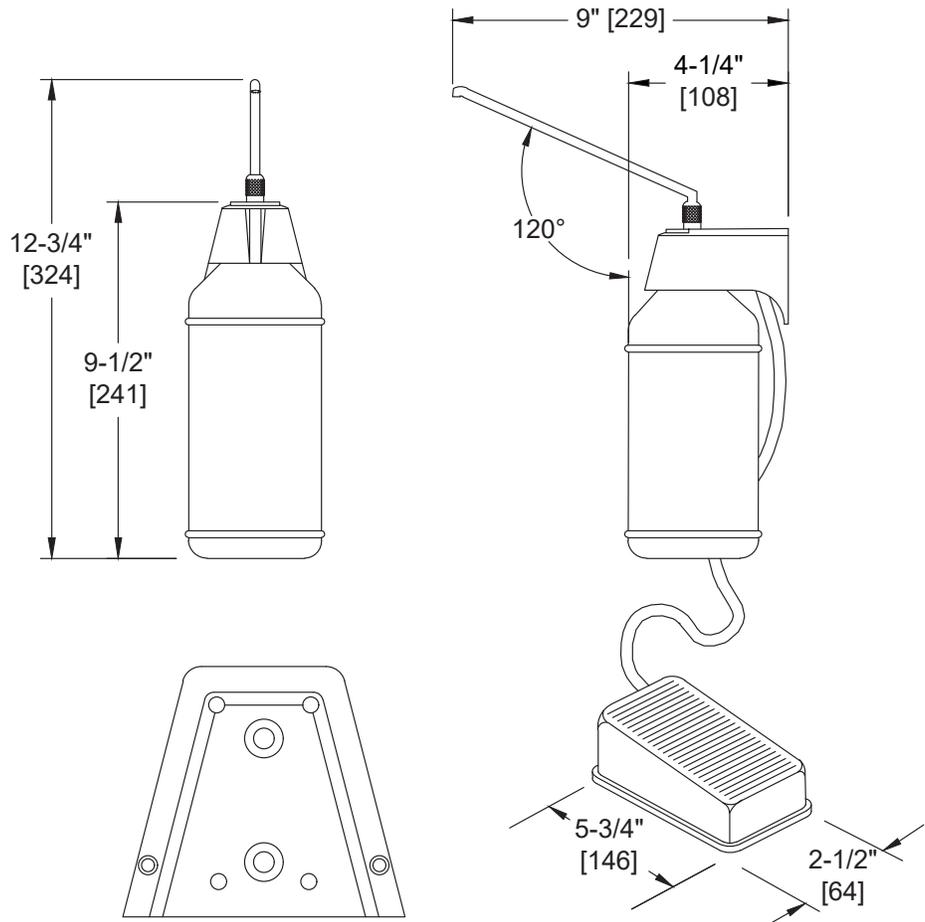

NOTE:
ALL DIM'S INCH [MM]
ILLUSTRATION FOR REF ONLY AND NTS
SEE SOAP DISPENSER CARE & MAINTENANCE
DOCUMENT ONLINE FOR CLEANING

PRODUCT OVERVIEW

Pneumatic pump mechanism, 32 ounce (0.9 L) polyethylene container. Free turning spout is type 316 stainless steel. 96" [2438] long vinyl tubing attaches to anti-slip foot pump. Dispenses surgical soaps, antiseptic solutions and synthetic detergents. Soap Requirements: Proper usage of this dispenser requires, that only soap within the following range for viscosity and pH may be used. Viscosity Range (mPa•s or cP): 50 – 2500. pH Range: 5.5 ~ 8.5. Soaps containing reportable salts, chlorides and alcohols should be avoided.

KEY FEATURES & SPECIFICATIONS

- Foot Operated - pneumatic pump mechanism
- Dispenses surgical soaps, antiseptic solutions and synthetic detergents.
- Free turning spout is type 316 stainless steel
- Surface Mounted
- Foot Operated
- 32 oz. (0.9 L) Capacity

OPERATION & MAINTENANCE

Soap is dispensed when the foot pump is depressed until reservoir is empty. Check valve prevents siphoning. The soap spout swings freely over 180° thereby allowing manual repositioning for easy use. Unit is reloaded by unscrewing soap tank from valve housing. Translucent tank continuously indicates soap level and may be refilled at any time although soap will continue to feed properly until empty. Tank supply is refilled manually on cycle determined by maintenance needs.

TECHNICAL INFORMATION / PRODUCT PROPERTIES

Property	Value
Dimensions	4-1/4" x 12-3/4" x 9" [108 x 324 x 229] Spout Projection: 4-3/4" [121]
Construction	Type 316 stainless steel
Mounting	Surface Mounted
Options	N/A

INSTALLATION

Unit is surface mounted to wall or partition using #10 self-threading screws (supplied) through holes provided in wall bracket into metal inserts in valve housing. For maximum usability and compliance with ADA Accessibility Guidelines, install unit so that spout is 48" [1219] maximum Above Finished Floor (AFF) or 46" [1168] max AFF with side reach over an obstruction (e.g.: vanity). Recommended installation is 42" [1066] AFF or 16" [406] maximum above wash basin.

WARRANTY

One (1) Year from date of Invoice