

Hands Free Foot Grip Door Pull

Specialty Accessories

MasterFormat Section 10 28 13








Sustainability/LEED

Scan for

Information

MR 4.1 (1) MR 6 (1) EQ 4.2 (1) MR 4.2 (1) EQ 4.1 (1) EQ 4.4 (1)

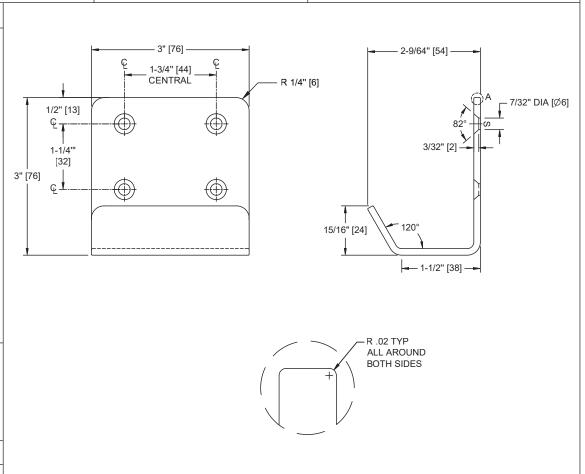

NOTE:

ALL DIM'S INCH [MM]
ILLUSTRATION FOR REF ONLY AND NTS

PRODUCT OVERVIEW

Hands-free foot grip door pull provides an alternative to open doors without having to use hands. Users with strong leg muscles can step on grip to pull door open and then side step to continue pushing door open from side. Grip is surface mounted with self-threading flat head screws (by others) through holes provided, at base of door aligned with bottom edge or slightly above, and as close to opening side as possible. Constructed of 11 gauge type 304 stainless steel with satin finish and fully deburred edges for user safety. Can be installed retroactively to door installation.

KEY FEATURES & SPECIFICATIONS

- An alternative to open doors without having to touch the handle surface with your bare hands.
- Step on the foot grip and pull the door open using leg strength
- Type 304 Stainless Steel Satin Finish
- Heavy Duty 11 gauge thickness
- Surface Mounted
- Easy to retroactively mount to existing doors.
- Fits a variety of interior doors including bathroom doors

Saw Mill River Road, Yonkers, NY 476-9000 American Specialties, Inc. 10701 (914)www.americanspecialties.com Model:#0504 Revision: R1 Issued: 11/1/2021 Revised: 3/10/2023

CSI:10 28 13 **Toilet Accessories** Page: 1 of 2



0	PERATION	&	M_{AIN}	TENANCE

Hands-free arm grip door pull provides alternative to open doors without having to use hands.

TECHNICAL INFORMATION / PRODUCT PROPERTIES

Property	Value
Dimensions	3" [76] W x 3" [76] H x 2-9/64" [54] D
Construction	Type 304 Stainless Steel - Satin Finish Heavy Duty 11 gauge thickness
Mounting	Surface Mounted
Capacity	Fits a variety of interior doors including bathroom doors

INSTALLATION

Surface mount unit on door in-swing side using four (4) #10 self-threading Phillips flat-head screws (by others) through holes provided into suitable prepared mountings (by others) or other suitable mounting hardware (by others) to suit door conditions. Install unit at base of door aligned with bottom edge or slightly above and as close to opening side as possible.

ADDITIONAL INFORMATION

N/A

WARRANTY

One (1) Year from date of Invoice

American Specialties, Inc. | 441 Saw Mill River Road, Yonkers, NY 10701 | (914) 476-9000 | www.americanspecialties.com

Model:#0504 Revision: R1 Issued: 11/1/2021 Revised: 3/10/2023