

Toilet Tissue Roll Holder (Single), Hooded

Toilet Tissue Dispensers

MasterFormat Section 10 28 13




Scan for Information



SUSTAINABILITY/LEED

MR 4.1 (1) MR 6 (1) EQ 4.2 (1)

MR 4.2 (1) EQ 4.1 (1) EQ 4.4 (1)

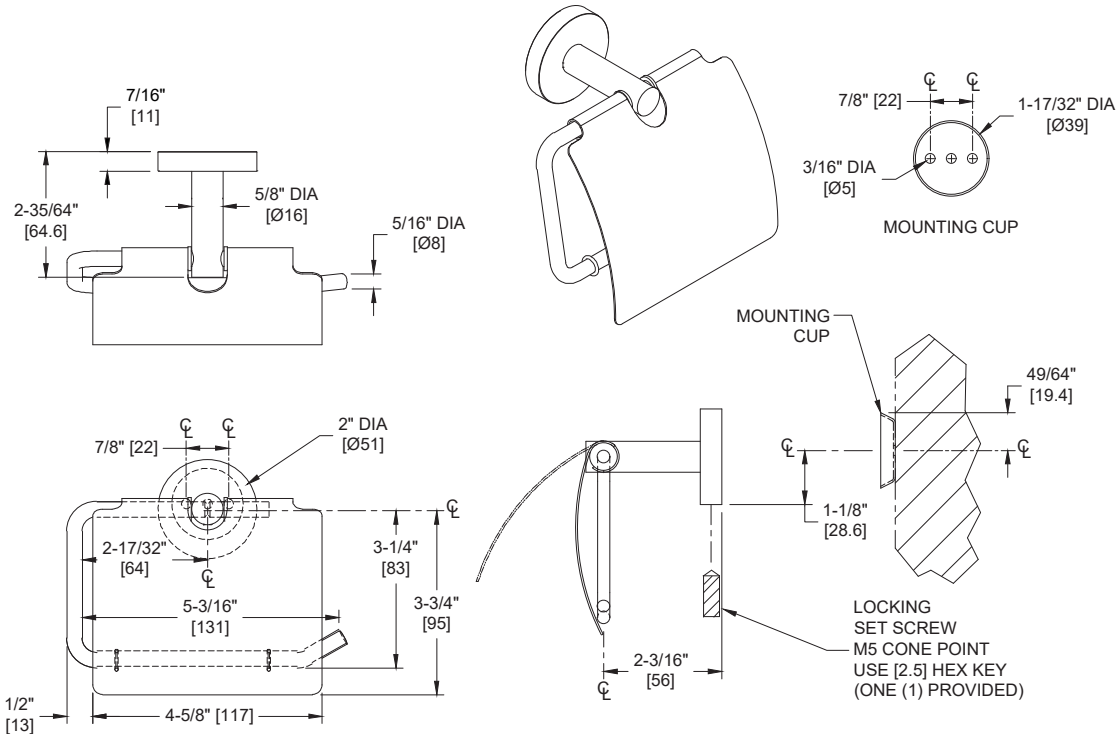

NOTE:

ALL DIM'S INCH [MM]

ILLUSTRATION FOR REF ONLY AND NTS

PRODUCT OVERVIEW

The toilet paper roll placed on this bail-type holder has unrestricted feed. Its design allows for easy replacement by anyone. All exposed surfaces are satin finish stainless steel. Paper bar is reversible to change handing. Hood adds weight for easy tear and also protects paper roll from contamination. Hex L-key (M2.5) is provided to lock set screw to secure unit to wall bracket.

KEY FEATURES & SPECIFICATIONS

- Single Roll - Hooded Dispenser
- Type 304 Stainless Steel - Satin Finish
- Surface Mounted
- Post shall be solid bar type 304 stainless steel
- 19 Gauge Mounting Cup

OPERATION & MAINTENANCE

One roll of toilet paper is placed on the bail type holder for ready availability and feed is unrestricted. Hood protects roll from inadvertent contamination and swings independently of bail to maintain protective contact throughout supply level usage cycle. Toilet paper is replenished on a cycle determined by maintenance needs.

TECHNICAL INFORMATION / PRODUCT PROPERTIES

Property	Value
Dimensions	5-21/32" W x 4-3/4" H x 3-7/8" D [144 x 121 x 98]
Construction	Type 304 Stainless Steel - Satin Finish
Mounting	Surface Mounted
Capacity	Holds one (1) roll of standard core roll toilet paper up to 5" Dia. [Ø127]

INSTALLATION

Surface mount unit to finished wall with two (2) #6 x 1-1/2" [M4 x 39] pan head self-threading screws (provided) through holes provided in mounting cup into plastic wall anchors (provided) or other suitably prepared mountings (by others) or other suitable mounting hardware (by others) to suit wall conditions. Clip flange onto mounting cup and tighten setscrew (provided) to lock it in place. For compliance with 2010 ADA Accessibility Standards install unit so that top of paper holder is between 19" [483] minimum AFF (Above Finished Floor) to 48" [1219] maximum AFF and centerline of post is between 7" [178] and 9" [229] from front of commode. Recommended general mounting height is 32" [813] AFF.

OPTIONS**WARRANTY**

One (1) Year from date of Invoice